


ArcelorMittal → Products & Services → Production Range → AZ® sections → AZ 25-800

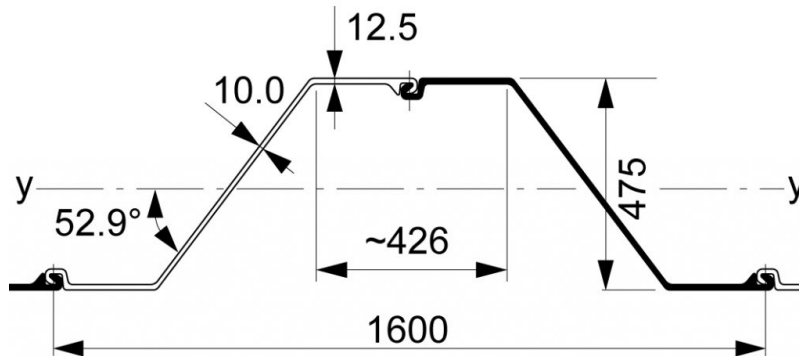

AZ 25-800

	A	G	I_y	$W_{el,y}$	r_g	A_L
	cm ²	kg/m	cm ⁴	cm ³	cm	m ² /m
Per S	130.6	102.6	47 530	2 000	19.07	1.06
Per D	261.3	205.1	95 060	4 005	19.07	2.11
Per m of wall	163.3	128.2	59 410	2 500	19.07	1.32

A	Sectional area
G	Mass per m
I_y	Moment of inertia about the main neutral axis y-y
$W_{el,y}$	Elastic section modulus
r_g	Radius of gyration about the y-y axis
A_L	Coating area. One side, excludes inside of interlocks
S	Single pile
D	Double pile

Download

- [AZ25-800-s.dwg](#)
- [AZ25-800-s.dxf](#)
- [AZ25-800-d.dwg](#)

- [AZ25-800-d.dxf](#)

AZ[®] sections ">