


ArcelorMittal → Products & Services → Production Range → AZ® sections → AZ 26-700

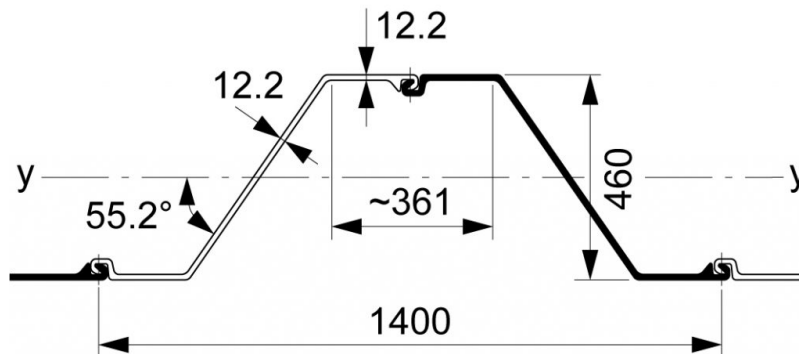

AZ 26-700

	A	G	I_y	$W_{el,y}$	r_g	A_L
	cm ²	kg/m	cm ⁴	cm ³	cm	m ² /m
Per S	131.0	102.9	41 800	1 815	17.86	0.97
Per D	262.1	205.7	83 610	3 635	17.86	1.93
Per m of wall	187.2	146.9	59 720	2 600	17.86	1.38

A	Sectional area
G	Mass per m
I_y	Moment of inertia about the main neutral axis y-y
$W_{el,y}$	Elastic section modulus
r_g	Radius of gyration about the y-y axis
A_L	Coating area. One side, excludes inside of interlocks
S	Single pile
D	Double pile

Download

- [AZ26-700-s.dwg](#)
- [AZ26-700-s.dxf](#)
- [AZ26-700-d.dwg](#)